




FC Face Mill Arbor (DIN6357)

BT/SK/HSK



- Min. 80% taper fit
- Taper 30 DIN AD standard
- Taper 40 & 50 DIN AD/B standard
- FX coolant ports version (option)

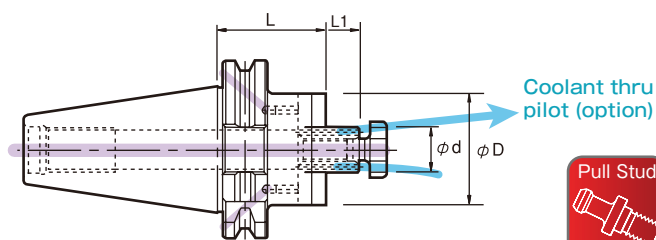


P.65

Taper	Code No.	ϕd	ϕD	L	L1
BT30	BT30-FC16-040	16	38	40	17
	BT30-FC22-040	22	48	40	19
	BT30-FC27-040	27	58	40	21
BT40 (SK40)	BT40-FC16-040	16	38	40	17
	BT40-FC16-100			100	
	BT40-FC16-150			150	
	BT40-FC22-040/045	22	48	40/45	19
	BT40-FC22-090			90	
	BT40-FC22-150			150	
	BT40-FC27-040	27	58	40	21
	BT40-FC27-090			90	
	BT40-FC32-050		78	50	24
	BT40-FC32-090	32		90	
	BT40-FC40-050	40		50	27
BT50 (SK50)	BT50-FC22-040	22	48	40	19
	BT50-FC22-100			100	
	BT50-FC22-150			150	
	BT50-FC22-200*			200	
	BT50-FC22-250*			250	
	BT50-FC22-300*			300	
	BT50-FC22-350*			350	
	BT50-FC27-040	27	58	40	21
	BT50-FC27-090			90	
	BT50-FC27-150			150	
	BT50-FC27-200*			200	
	BT50-FC27-250*			250	
	BT50-FC27-300*			300	
	BT50-FC27-350*			350	
	BT50-FC32-050	32	78	50	24
	BT50-FC32-100			100	
	BT50-FC32-150			150	
	BT50-FC32-200*			200	
	BT50-FC32-250*			250	
	BT50-FC32-300*			300	
	BT50-FC32-350*			350	
	BT50-FC40-050	40	88	50	27
HSK 63A	HSK 63A-FC16-050	16	38	50	17
	HSK 63A-FC16-100	22	48	100	19
	HSK 63A-FC22-050			50	
	HSK 63A-FC22-100	27	58	100	21
	HSK 63A-FC27-050			50	
	HSK 63A-FC27-100			100	
	HSK 63A-FC32-060	32	78	60	24
	HSK 63A-FC32-100			100	
	HSK 63A-FC40-060	40	88	60	27

*Not regular stock items. Please ask for availability.



Pull Stud

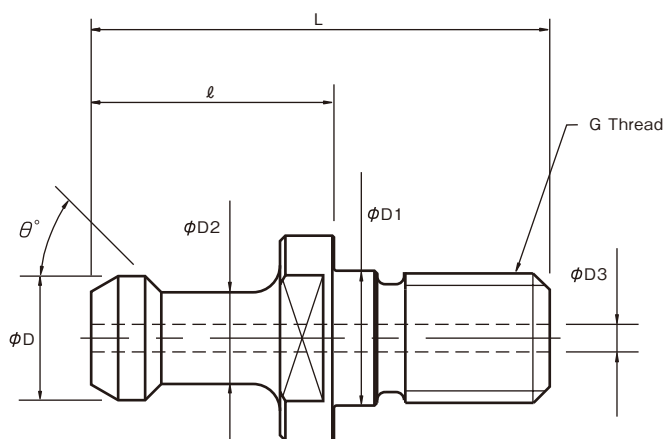

It is critical that the correct pull stud is used with each machining center. Please verify all dimensions prior to ordering. Machine specifications will be located in your machine manual.

Spindle	Code No.	ϕD	L	l	D2	D1	G	θ°	D3	Note
BT30	HPS-16	11	43	23	7	12.5	M12	45	-	MAS P30T-1
	HPS-16C	11	43	23	7	12.5	M12	45	2.5	HPS-16 Coolant
	HPS-17	11	43	23	7	12.5	M12	60	-	MAS P30T-2
	HPS-17C	11	43	23	7	12.5	M12	60	2.5	HPS-17 Coolant
BT40	HPS- 1	15	60	35	10	17	M16	45	-	MAS P40T-1
	HPS- 2	15	60	35	10	17	M16	60	-	MAS P40T-2
	HPS-806-1	19	54	29	14	17	M16	75	6	JIS B6339. Coolant
	HPS-G51	18.796	44.106	19.106	12.446	17	M16	45	7	Mazak type. Coolant
	HPS-O8	15	60	35	10	17	M16	90	-	90 degree angle type
	HPS-301	15	60	35	11	17	M16	60	-	
	HPS-302	19	54	26	14	17	M16	75	-	DIN69872.
	HPS-366E-1	19	54	29	14	17	M16	75	7	P-9, S 15 O-ring
	HPS-805	19	54	29	14	17	M16	75	-	JIS B6339-89
	HPS-813-1	19	54	29	14	17	M16	75	6	JIS B6339-89
BT50	HPS-B62-1	19	54	29	14	17	M16	75	4	S 15 O-ring
	HPS- 5	23	85	45	17	25	M24	45	-	MAS P50T-1
	HPS- 6	23	85	45	17	25	M24	60	-	MAS P50T-2
	HPS-G41	28.956	65.2	25.2	20.828	25	M24	45	10	
SK30	HPS-122	13	44	24	9	13	M12	75	-	DIN69872 SK30 FORM A
SK40	HPS-302	19	54	26	14	17	M16	75	-	DIN69872 SK40 FORM A
	HPS-309	19	54	26	14	17	M16	75	7	DIN69872 SK40 FORM A Coolant
	HPS-309C	19	54	26	14	17	M16	75	7	DIN69872 SK40 FORM B
	HPS-A1	19	54	26	14	17	M16	75	7	ISO-7388/2-1984-A
	HPS-A4	18.95	44.5	16.4	12.95	17	M16	45	7.35	ISO-7388/2-1984-B
SK50	HPS-581	28	74	34	21	25	M24	75	-	DIN69872 SK50 FORM A
	HPS-512	28	74	34	21	25	M24	75	11.5	DIN69872 SK50 FORM A Coolant
	HPS-512B	28	74	34	21	25	M24	75	11.5	DIN69872 SK50 FORM B
	HPS-A3	28	74	34	21	25	M24	75	11.5	ISO-7388/2-1984-A
	HPS-A6	29.1	65.5	25.55	19.6	25	M24	45	11.55	ISO-7388/2-1984-B

◇Other Pull Studs are available upon request.